

Proflow™ II-E Select

High-performance cartridge for ultrapure microelectronics fluids and gases

The Proflow™II-E-SELECT filter cartridge provides exceptional flow rates and on-stream life. It uses a PTFE membrane along with high-purity polypropylene supports that provide an economical alternative to all fluoropolymer cartridges. With its unique SELECT pleating technology, the liquid flow rates are increased by up to 50% versus our standard Proflow®II-E. This filter is ideally suited for ultrapure microelectronics fluids and gases. It is available dry or wet-packed for quick installation and lower extractables.



Contact Information

Parker-Hannifin Corporation
domnick hunter
Process Filtration - N.A.
2340 Eastman Avenue
Oxnard, California, USA 93030

toll free +1 877 784 2234
phone +1 805 604 3400
fax +1 805 604 3401
dhpsales.na@parker.com

www.parker.com/processfiltration

Benefits

- Excellent liquid and gas flow rates
- Wet-pack option for quick installation
- PTFE/ PP construction for chemical resistance
- 100% integrity tested in cleanroom environment

Applications

- Bulk chemical delivery
 - Acids, bases, solvents, photochemicals
- Wet etch and clean
 - Dilute acids
 - DI water (<80°C)
- Ultrapure electronics-grade gases



ENGINEERING YOUR SUCCESS.

Proflow™ II-E Select

SPECIFICATIONS

Materials of Construction

Membrane: PTFE
 Support layers: Polypropylene
 Structure: Polypropylene

All components are thermally bonded to ensure integrity and reduce extractables.

Effective Filtration Area

12.4ft² (1.15m²) per 10" (250mm) cartridge

Maximum Differential

Pressure/Temperature

Forward: 70psid (4.8bar) @ 68°F (20°C)
 40psid (2.8bar) @ 180°F (82°C)

Reverse: 40psid (2.8bar) @ 68°F (20°C)

Cleanliness (particle shedding)

Wet-packed: <1 particles/ml >0.2µm
 after 6gal @ 1gpm

Data as from open bag and installed, no additional installation flushing.

TOC/Resistivity Rinse-up (wet-packed)


TOC rinse-up to background plus 5ppb of feed after 70gal @ 1gpm.

Resistivity rinse-up to background minus 0.2megohm-cm of feed after 30gal @ 1gpm.

Performance Attributes

Water flow rates, Typical*		
Micron	gpm/psid	lpm/100mbar
0.03	0.8	4.4
0.05	1.3	7.1
0.1	2.6	14
0.2	3.5	19

* Per 10-inch (250mm) cartridge equivalent.

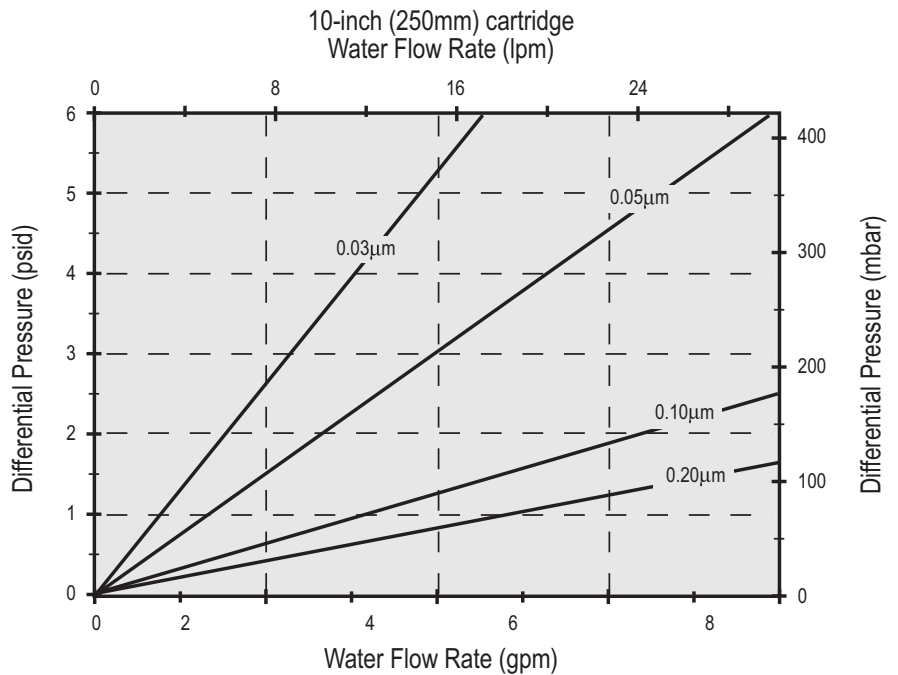

Ordering Information

Each cartridge is identified with a product number, pore size and lot number for traceability.

PS - [] **0** [] [] [] - [] [] [] - [] - **E** []

Styles		End Fitting		Length			Filter Rating		O-Rings		Treatment	
CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	INCHES	mm	CODE	MICRON	CODE	MATERIAL	CODE	OPTIONS
1	None (Std.)	2	226 Flat	10	10"	250	923	0.03	1	EPDM	Blank	Standard
5	Encapsulated Stainless Steel	3	222 Flat	20	20"	500	925	0.05	2	Silicone	W	Wet Packed
6	Encapsulated Polysulfone	7	226 Fin	30	30"	750	001	0.1	4	Viton®		
A	½" Shortened on 222 Fitting	8	222 Fin	40	40"	1000	002	0.2	5	FEP-Encapsulated Viton®		
									6	FEP-Encapsulated Silicone		
									N	None		

Specifications are subject to change without notification.
 For User Responsibility Statement, see www.parker.com/safety
 Proflow is a registered trademark of Parker-Hannifin Corporation.
 Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc.

© 2008 Parker-Hannifin Corporation
 domnick hunter Process Filtration - N.A.
 All Rights Reserved

