

Level measurement

Continuous level measurement
Controllers

MultiRanger 100/200

Overview



MultiRanger is a versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries.

Benefits

- Digital input for back-up level override from point level device
- Communication using built-in Modbus RTU via RS 485
- Compatible with SmartLinx communication options or SIMATIC PDM via RS 485
- Single or dual point level monitoring
- Auto False-Echo Suppression for fixed obstruction avoidance
- Differential amplifier transceiver for common mode noise reduction and improved signal-to-noise ratio
- MultiRanger 100: level measurements, simple pump control, and level alarm functions
- MultiRanger 200: level, volume, and flow measurements in open channels, differential control, extended pump control, and alarm functions
- Wall and panel mounting options

Application

MultiRanger can be used on different materials, including fuel oil, municipal waste, acids, woodchips, or on materials with high angles of repose. MultiRanger offers true dual point monitoring, digital communications with built-in Modbus RTU via RS 485, as well as compatibility with SIMATIC PDM, allowing PC configuration and setup. MultiRanger features Sonic Intelligence advanced echo-processing software for increased reading reliability.

MultiRanger 100 offers cost-effective level alarming, as well as on/off and alternating pump control. MultiRanger 200 will monitor open channel flow and features more advanced relay alarming and pump control functions as well as volume conversion.

It is compatible with chemical-resistant EchoMax transducers that can be used in hostile environments at temperatures as high as 145 °C (293 °F).

- Key Applications: wet wells, flumes/weirs, bar screen control, hoppers, chemical storage, liquid storage, crusher bins, dry solids storage

Design

The MultiRanger is available in wall or panel mounting options.

Technical specifications

Mode of Operation		
Measuring principle		Ultrasonic level measurement
Measuring range		0.3 ... 15 m (1 ... 50 ft)
Measuring points		1 or 2
Input		
Analog (MultiRanger 200 only)		0 ... 20 mA or 4 ... 20 mA, from alternate device, scalable
Discrete		10 ... 50 V DC switching level Logical 0 ≤ 0.5 V DC Logical 1 = 10 ... 50 V DC Max. 3 mA
Output		
EchoMax transducer	44 kHz	
Ultrasonic transducer	Compatible transducers: ST-H and EchoMax series XPS-10, XPS 15/15F, and XRS-5	
Relays	Rating 5 A at 250 V AC, non-inductive 1 SPST Form A	
• Version with 1 relay (MultiRanger 100 only)		
• Version with 3 relays	2 SPST Form A/1 SPDT Form C	
• Version with 6 relays	4 SPST Form A/2 SPDT Form C	
mA output	0 ... 20 mA or 4 ... 20 mA	
• Max. load	750 Ω, isolated	
• Resolution	0.1 % of range	
Accuracy		
Error in measurement	0.25 % of range or 6 mm (0.24 inch), whichever is greater	
Resolution	0.1 % of measuring range ¹⁾ or 2 mm (0.08 inch), whichever is greater	
Temperature compensation	• -50 ... +150 °C (-58 ... +302 °F) • Integral temperature sensor • External TS-3 temperature sensor (optional) • Programmable fixed temperature values	
Rated operating conditions		
Installation conditions	Indoor/outdoor II 4	
• Location		
• Installation category		
• Pollution degree		
Ambient conditions	-20 ... +50 °C (-4 ... +122 °F) -20 ... +50 °C (-4 ... +122 °F)	
• Ambient temperature (housing)		
• Storage temperature		
Design		
Weight	1.37 kg (3.02 lb) 1.50 kg (3.31 lb)	
• Wall mount		
• Panel mount		
Material (enclosure)	Polycarbonate	
Degree of protection (enclosure)	IP65/Type 4X/NEMA 4X IP54/Type 3/NEMA 3	
• Wall mount		
Electrical connection	Panel mount	
• Transducer and mA output signal		
• Max. separation between transducer and transceiver	2-core copper conductor, twisted, shielded, 0.5 ... 0.75 mm ² (22 ... 18 AWG), Belden 8760 or equivalent is acceptable 365 m (1 200 ft)	
Displays and controls		
Programming	100 x 40 mm (4 x 1.5 inch) multi-block LCD with backlighting	
Programming	Programming using hand-held programmer, SIMATIC PDM or via PC with Dolphin Plus software	
Power supply		
AC version	100 ... 230 V AC ± 15 %, 50/60 Hz, 36 VA (17 W)	
DC version	12 ... 30 V DC (20 W)	
Certificates and approvals		
	• CE, RCM, EAC, KCC ²⁾ • Lloyd's Register of Shipping • ABS Type Approval • FM, CSA/USC, UL listed • CSA Class I, Div. 2, Groups A, B, C, and D, Class II, Div. 2, Groups F and G, Class III (wall mount only), ATEX II 3D, EAC Ex	
Communication		
	• RS 232 with Modbus RTU or ASCII via RJ-11 connector • RS 485 with Modbus RTU or ASCII via terminal strips • Optional: SmartLinx cards for - PROFIBUS DP - DeviceNet	


¹⁾ Program range is defined as the empty distance to the face of the transducer plus any range extension

²⁾ EMC performance available on request

Level measurement

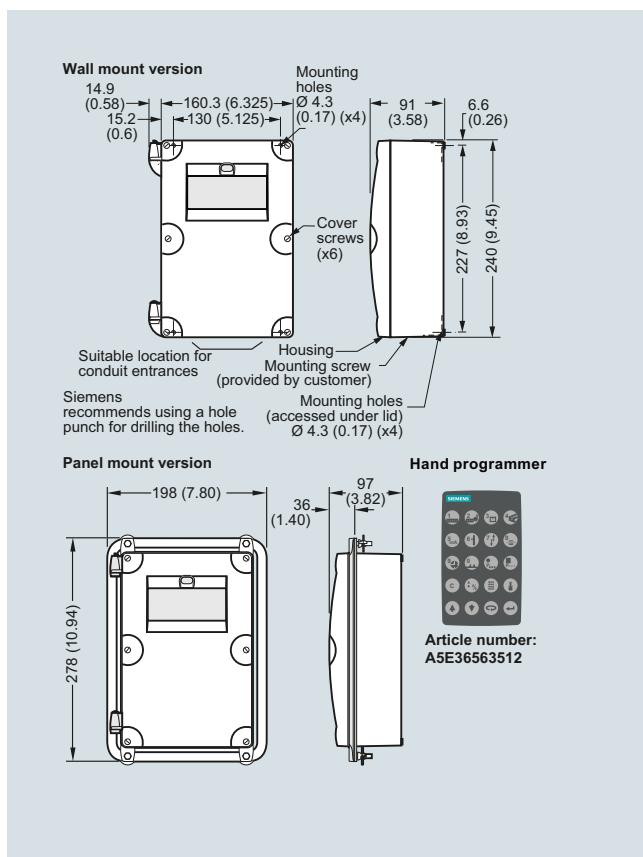
Continuous level measurement
Controllers

MultiRanger 100/200

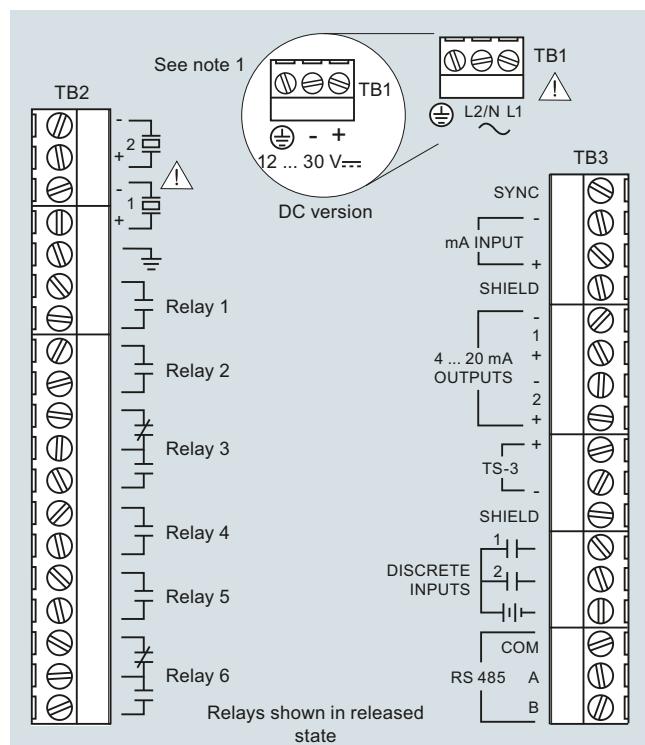
Selection and ordering data	Article No.	Order code
MultiRanger 200 Ultrasonic level controller Continuous, non-contact, 15 m (50 ft) range. Monitors level, volume, and open channel flow in liquids, slurries, and solids. ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ML5033- 	
Versions MultiRanger 100, level measurement only MultiRanger 200, level, volume, flow, and differential measurements	1 2	Further designs Please add "-Z" to Article No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text Y15
Mounting, enclosure design Wall mount, standard enclosure Wall mount, 4 entries, 4 M20 cable glands included Panel mount (CE, CSA _{US/C} , FM, UL)	A B C	Operating Instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation
Power supply 100 ... 230 V AC 12 ... 30 V DC	0 1 2 3	Accessories Handheld programmer A5E36563512 Tag, stainless steel, 12 x 45 mm (0.47 x 1.77 inch), one text line, suitable for enclosure 7ML1930-1AC M20 cable gland kit (4 M20 cable glands, 4 M20 nuts, 4 washers) 7ML1930-1FV Sunshield kit, 304 stainless steel 7ML1930-1GA SITRANS RD100, loop powered display - see Chapter 7 7ML5741-... SITRANS RD150, remote digital display for 4 ... 20 mA and HART devices - see Chapter 7 7ML5742-..... SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 7ML5740-... SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 7ML5744-...
Communication (SmartLinx) Without module SmartLinx PROFIBUS DP module SmartLinx DeviceNet module See SmartLinx product on page 4/348 for more information.	1 2 3 A B C	Spare parts Power Supply Board (100 ... 230 V AC) 7ML1830-1MD Power Supply Board (12 ... 30 V DC) 7ML1830-1ME MultiRanger 100/200/ HydroRanger 200 display, non-HMI 7ML1830-1MF Removable terminal blocks A5E38824197

¹⁾ For wall mount applications only.

²⁾ For standard enclosure wall mount, option A only.

Dimensional drawings

MultiRanger 100/200, dimensions in mm (inch)

Circuit diagrams**Note:**

1. Use 2-core copper wire, twisted, with shield, for expansion up to 365 m (1 200 ft). Route cable in grounded metal conduit, separate from other cables.
2. Verify that all system components are installed in accordance with instructions.
3. Connect all cable shields to the MultiRanger shield connections. Avoid differential ground potentials by not connecting cable shields to ground (earth) anywhere else.
4. Keep exposed conductors on shielded cables as short as possible to reduce noise on the line caused by stray transmissions and noise pickup.

MultiRanger 100/200 connections