

SPEEDTRACE & SPEEDTRACE EXTREME PRE-ASSEMBLED SELF-REGULATING HEATING CABLE

Features & Benefits

- ▶ Ideal for freeze protection and thawing metal or plastic pipes and valves
- ▶ Easy-to-install: Pre-assembled with choice of plug
- ▶ Safe to overlap and insulate
- ▶ Automatically adjusts heat output based on surface and ambient temperature
- ▶ Suitable for temperatures down to: -40°F (-40°C)
- ▶ Outdoor and indoor use

Specifications

Supply Voltage: 110-120 VAC; 208-277 VAC

Wattage at 50°F (10°C):

- SpeedTrace: 5 watts/ft (16 watts/m)
- SpeedTrace Extreme: 8 watts/ft (26 watts/m)
- SpeedTraceCE: 5 watts/ft (17 watts/m)

Maximum Exposure Temperature: 150°F (65°C)

Outer Jacket Material: Moisture and flame resistant thermoplastic elastomer

Bus Wire Gauge: 16 AWG

Power Cord:

- 110-120 VAC: 6 ft (1.8 m) long with 3-prong grounded NEMA 5-15P plug
- 208-277 VAC (SpeedTrace & SpeedTrace Extreme): 2.5 ft (0.76 m) long with bare wire leads
- 230 VAC (SpeedTraceCE): 2.5 ft (0.76 m) long with Schuko (CEE 7/7) plug



Plug & Play

NEW!




New and Improved power-indicating light let's you know heater is working



SpeedTrace &
SpeedTrace Extreme
Series



SpeedTraceCE
series

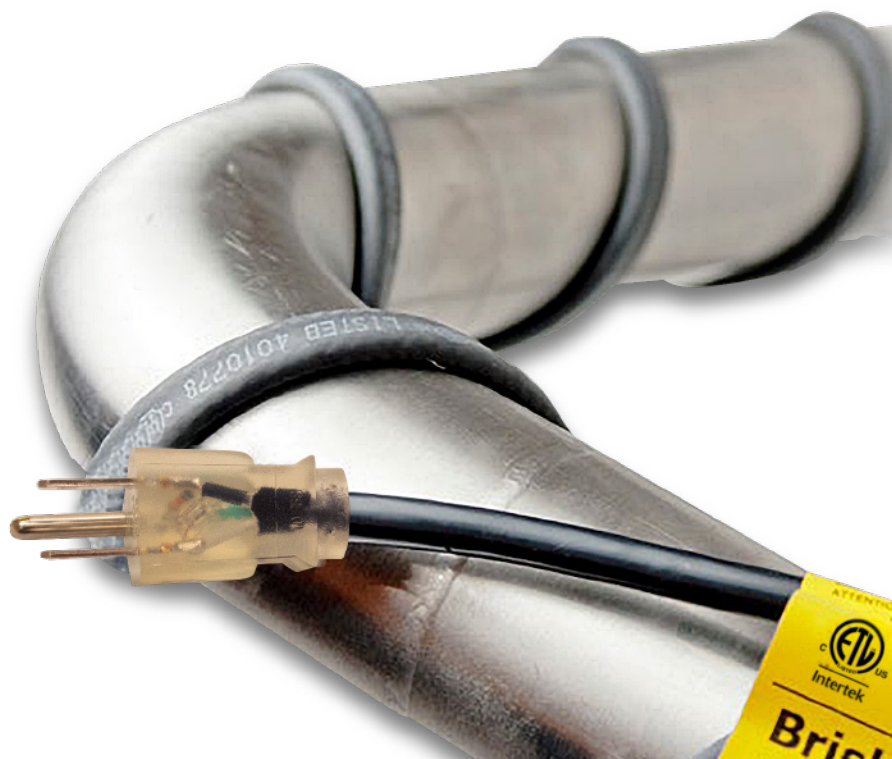

SPEEDTRACE & SPEEDTRACE EXTREME PRE-ASSEMBLED SELF-REGULATING HEATING CABLE

Features & Benefits

- ▶ Ideal for freeze protection and thawing metal or plastic pipes and valves
- ▶ Easy-to-install and pre-assembled with choice of plug
- ▶ Safe to overlap and insulate
- ▶ Automatically adjusts heat output based on surface and ambient temperature
- ▶ Suitable for temperatures down to: -40 °F (-40 °C)
- ▶ Outdoor and indoor use



New and Improved
power-indicating light lets you know heater is working

Specifications

Supply Voltage: 110-120 VAC; 208-277 VAC

Wattage at 50 °F (10 °C):

- SpeedTrace: 5 watts/ft (16 watts/m)
- SpeedTrace Extreme: 8 watts/ft (26 watts/m)
- SpeedTraceCE: 5 watts/ft (17 watts/m)

Maximum Exposure Temperature: 150 °F (65 °C)

Outer Jacket Material: Moisture and flame resistant thermoplastic elastomer

Bus Wire Gauge: 16 AWG

Power Cord:

- 110-120 VAC: 6 ft (1.8 m) long with 3-prong grounded NEMA 5-15P plug
- 208-277 VAC (SpeedTrace & SpeedTrace Extreme): 2.5 ft (0.76 m) long with bare wire leads
- 230 VAC (SpeedTraceCE): 2.5 ft (0.76 m) long with Schuko (CEE 7/7) plug



Plug & Play



SpeedTrace & SpeedTrace Extreme Series



SpeedTraceCE series

Ordering Information

SpeedTrace

5 watts/ft @ 50 °F
(16 watts/m @ 10 °C)

SpeedTrace Extreme

8 watts/ft @ 50 °F
(26 watts/m @ 10 °C)

**60%
MORE
WATTAGE**


SpeedTraceCE

5 watts/ft @ 50 °F
(17 watts/m @ 10 °C)


Part No. 110-120 V	Part No. 208-277 V	Length ft (m)
FFSL1-6	FFSL2-6	6 (1.8)
FFSL1-12	FFSL2-12	12 (3.7)
FFSL1-18	FFSL2-18	18 (5.5)
FFSL1-24	FFSL2-24	24 (7.3)
FFSL1-37	FFSL2-37	37 (11.3)
FFSL1-50	FFSL2-50	50 (15.2)
FFSL1-62	FFSL2-62	62 (18.9)
FFSL1-75	FFSL2-75	75 (22.8)
FFSL1-87	FFSL2-87	87 (26.5)
FFSL1-100	FFSL2-100	100 (30.5)
FFSL1-125	FFSL2-125	125 (38.1)
FFSL1-150	FFSL2-150	150 (45.7)

Part No. 110-120 V	Part No. 208-277 V	Length ft (m)
FFSL81-6	FFSL82-6	6 (1.8)
FFSL81-12	FFSL82-12	12 (3.7)
FFSL81-18	FFSL82-18	18 (5.5)
FFSL81-24	FFSL82-24	24 (7.3)
FFSL81-50	FFSL82-50	50 (15.2)
FFSL81-75	FFSL82-75	75 (22.8)
FFSL81-100	FFSL82-100	100 (30.5)


Part No. 230 V	Length ft (m)
FFSLE2-2M	6.6 (2)
FFSLE2-4M	13.1 (4)
FFSLE2-8M	26.2 (8)
FFSLE2-16M	52.5 (16)

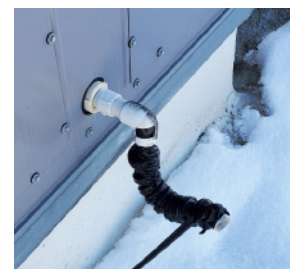

SpeedTraceCE series with 2-prong Schuko (CEE 7/7 plug)

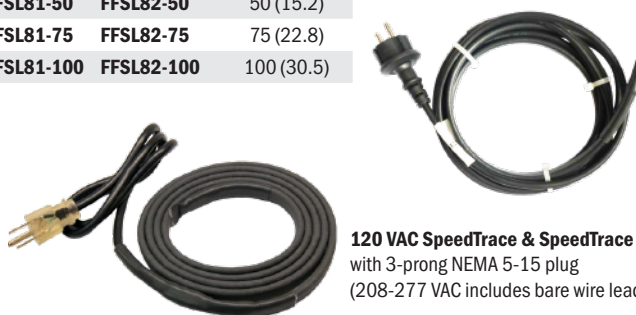

120 VAC SpeedTrace & SpeedTrace Extreme with 3-prong NEMA 5-15 plug (208-277 VAC includes bare wire leads)

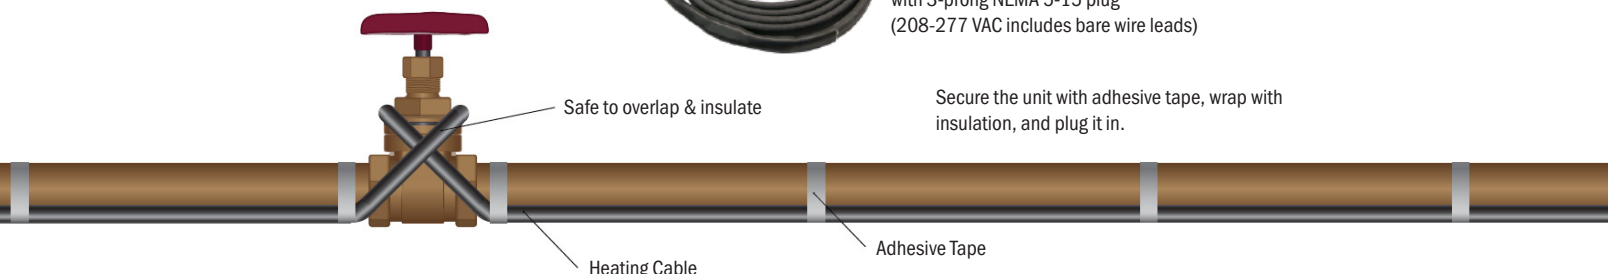

Secure the unit with adhesive tape, wrap with insulation, and plug it in.